
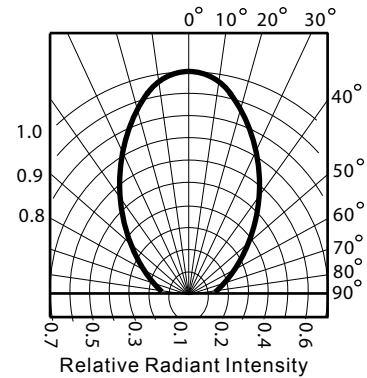
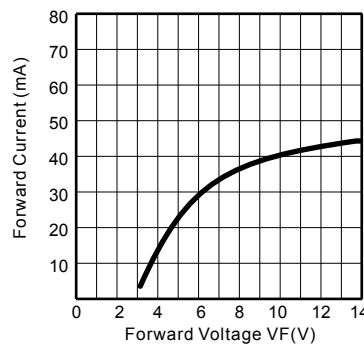
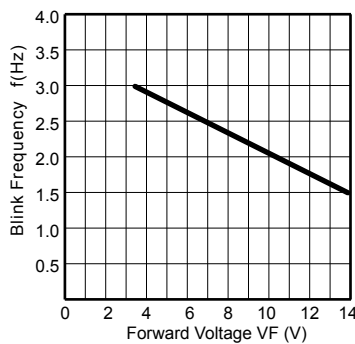
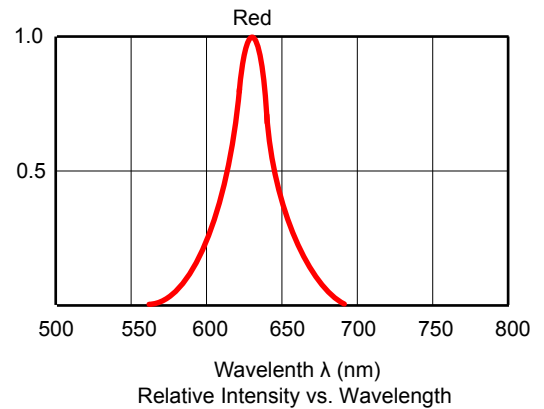


### KTB050CDI

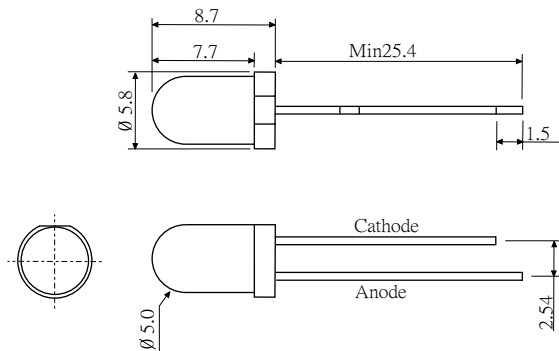

- \* 5mm with Red Dice with built in blinkong I.C.
- \* Encapsulated with Diffused package.
- \* long leads.
- \* Blinking time 1/2 Seconds.

#### Absolute Maximum Ratings:

Parameter	Maximum Rating	Unit
Peak Forward Current	120	mA
Continuous Forward Current	30	mA
Operating temperature Range	-20°C + 75°C	
Storage Temperature Range	-40°C + 100°C	
Lead Soldering Temperature	260°C for 5 seconds	

#### Electre-Optical Characerture (Ta=25°C)

Parameter Radiant	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	If=10mA	Vf	2.0	2.2	2.6	V
Reverse Current	Vr=5V	Ir			10	uA
Luminous Intensity	If=10mA	Iv	200	300	400	mcd
Spectral Bandwidth	If=10mA	$\Delta\lambda$				nm
Wavelength	If=10mA	$\lambda_p$		630	635	nm
		$\lambda_d$				nm
Half View Angle	If=10mA	2 $\theta$ 1/2		30		deg