


ATTENTION
 OBSERVE PRECAUTIONS
 FOR HANDLING
 ELECTROSTATIC
 DISCHARGE
 SENSITIVE
 DEVICES


HL-3528U70G30B27N6-12 GREEN

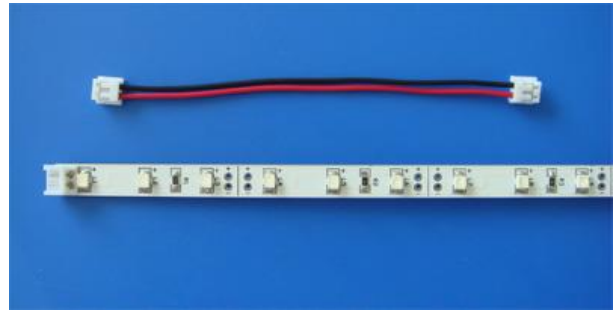

Features

- 485MMX8MM SMD LIGHT BAR (30-LED) .
- PRINTED CIRCUIT BOARD THICKNESS: 1.6MM
- WORKING VOLTAGE: 12V DC.
- WORKING CURRENT: 200MA.
- LED VIEW ANGLE(2θ 1/2):120° .
- PACKAGE: 1PCS / PVC TUBE.

Package Dimensions

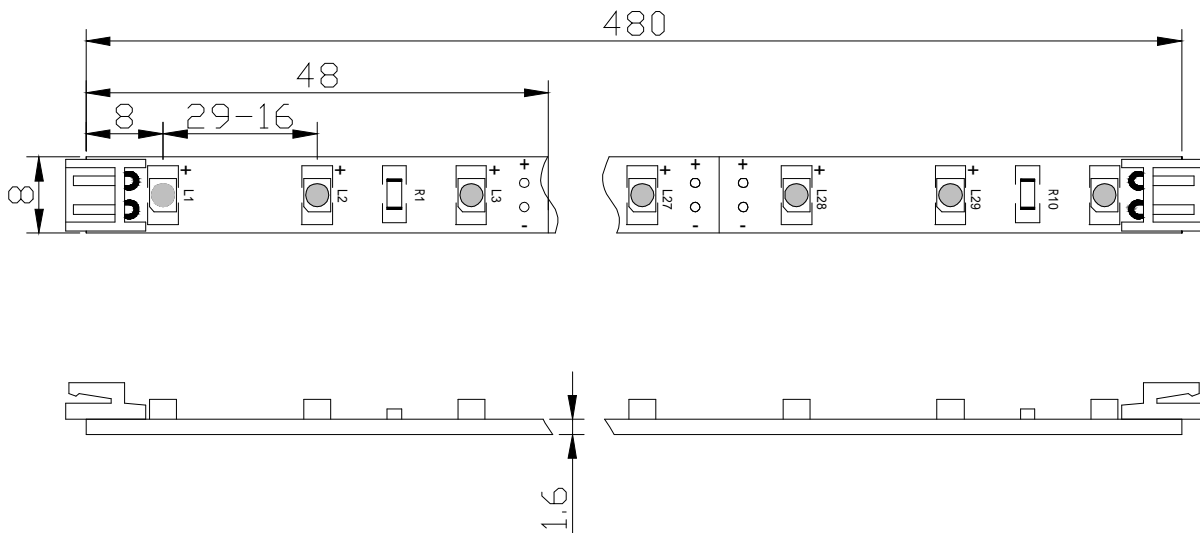

Notes:

1. All dimension units are millimeters.
2. All dimension tolerance is ± 1 mm unless otherwise noted.

Absolute Maximum Rating at TA=25°C

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	200	mA
Power Dissipation	PD	2.4	W
Electrostatic discharge	ESD	800	V
Operating Temperature	Topr	-25~+60	°C
Storage Temperature	Tstg	-40~+80	°C

Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage DC	VF	IF=200mA	--	12	--	V
Dominant Wavelength	λ_D	IF=200mA	515	520	--	nm
Luminous flux	ϕ_V	IF=200mA	--	57	--	lm
Recommend Forward Current	IF(rec)	--	--	200	--	mA

Notes:Tolerance of measurement of luminous intensity±15%.

Package means



APPLICATIONS

- EDGE-LIGHTING OF TRANSPARENT OR DIFFUSED MATERIALS.
- PATH&CONTOUR MARKING.
- EMERGENCY/RESCUE SIGNS.
- TO COUPLE LIGHT INTO TRANSPARENT OR DIFFUSED GLASS .