Honglitronic®

Under Development	
Mass production	●

High Power Emitter LED
P/N:EK2G5EEC-1(Green)

ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES



Features

- Long operating life
- Highest flux
- Available in green
- Lambertian radiation pattern
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Instant light (less than 100ns)
- Fully dimmable
- No UV
- Superior ESD protection
- Eutectic die bonding
- RoHS compliant

Applications

- Reading lights (car, bus, aircraft)
- LCD Backlights/light Guides
- Fiber optic alternative/ Decorative / Entertainment
- Mini-accent/Up lighters/Down lighters/ Orientation
- Indoor/Outdoor commerclal and Residentlal Architectural
- Cove/Under shelf/Task
- Bollards/Security/Garden
- Portable (flashlight, bicycle)
- Edge-lit signs (Exit, point of sale)
- Automotive Exit (Stop-Tail-Turn,CHMSL, Mirror Side Repeat)
- Traffic signaling / Beacons / RailCrossing and Wayside

Radiation Pattern

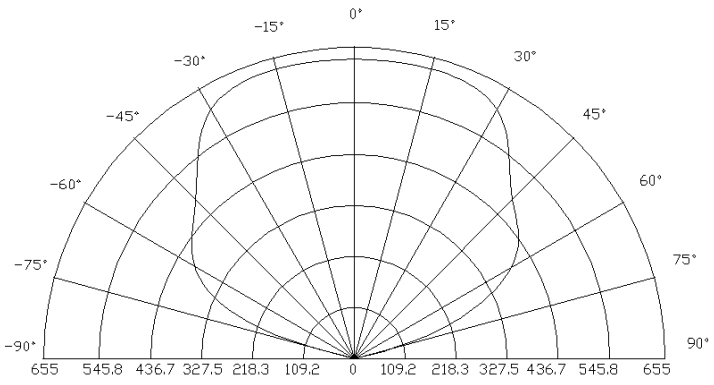

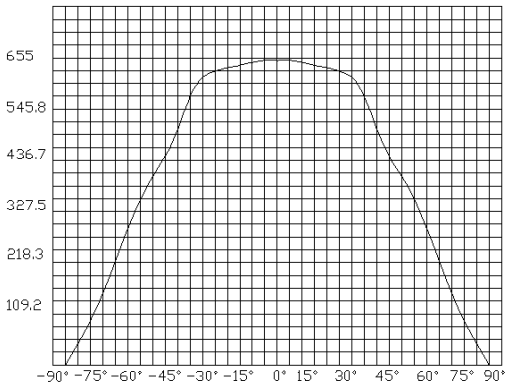

High Power Emitter LED
P/N:EK2G5EEC-1(Green)

Typical Optical/ Electrical Characteristics @T_a=25℃

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	IF=1.2A	3.2		4.2	V
Reverse Current	I_R	VR=5v	--	--	50	uA
50% Power Angle	2θ1/2	IF=1.2A	120		140	deg
Luminous Intensity	φ_V	IF=1.2A	168.4		--	lm
Recommend Forward Current	I_F	- -	--	1.2	--	A
Wave Length	λ_d	IF=1.2A	520		530	nm
Thermal Resistance,Junction to Case	RJP	IF=1.2A	--	10	--	℃/w
The sample delivers goods data						
Item	Symbol	Condition	Min.	Avg.	Max.	Unit
Luminous Intensity	φ_V	IF=1.2A				lm
50% Power Angle	2θ1/2					deg
Forward Voltage	V_F					v
Wave Length	λ_d					nm

Notes:

1.Tolerance of measurement of forward voltage±0.1V.

2.Tolerance of measurement of peak Wavelength±2.0nm.

3.Tolerance of measurement of luminous intensity±15%.

Absolute Maximum Rating

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	I_F	1.2	A
Peak Forward Current*	I_{FP}	1.3	A
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	5000	mW
Electrostatic discharge	E_{SD}	±2000	V
Operation Temperature	T_{OPR}	-40~+80	℃
Storage Temperature	T_{STG}	-40~+100	℃
Lead Soldering Temperature*	T_{SOL}	Max. 260℃ for 3sec Max.	

*IFP Conditions：Pulse Width≤10msec duty≤1/10

* All high power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly, but we do not recommend lighting the high power products for more than 5 seconds without a appropriate heat dissipation equipment.

* Re-flow,wave peak and soak-stannum soldering etc.is not suitable for this products.

* Suggest to solder it by professional high power LED soldering machine.can't solder it by reflow soldering machine.

* Can use invariable-temperature searing-iron with soldering condition:≤260 degree less than 3 seconds.

Typical Optical/Electrical Characteristics Curves (T_a=25℃ Unless Otherwise Noted)

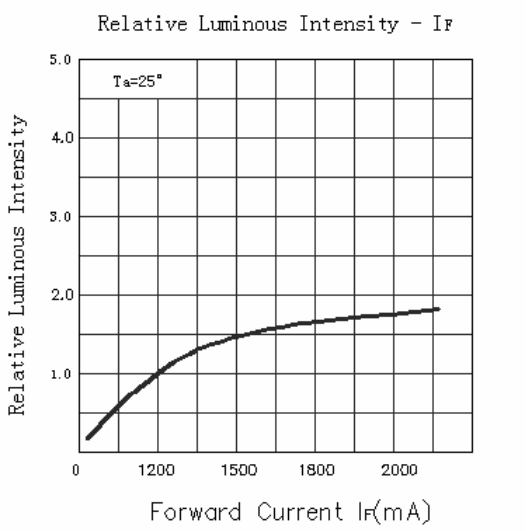

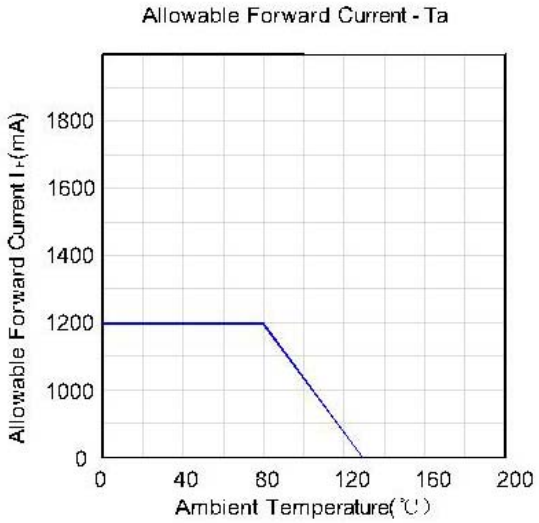

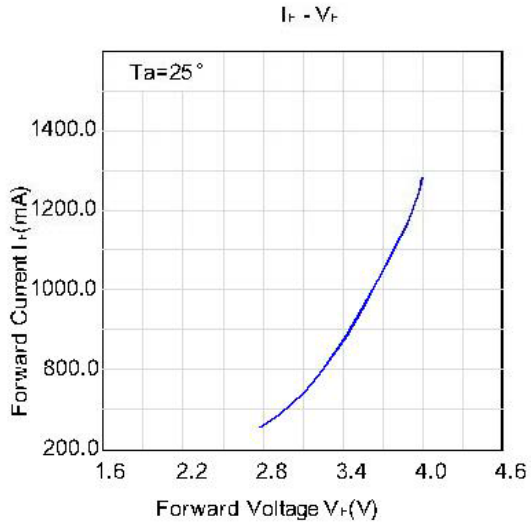

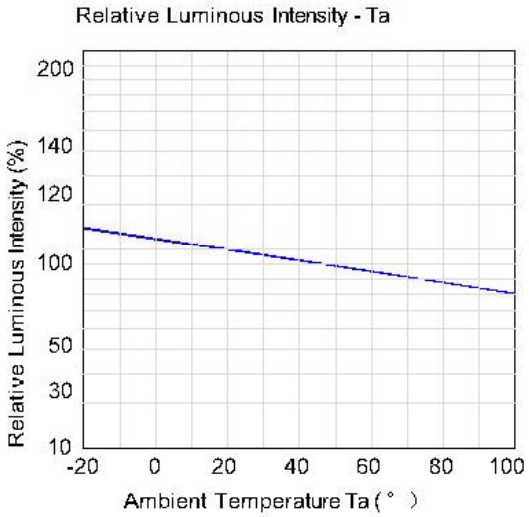

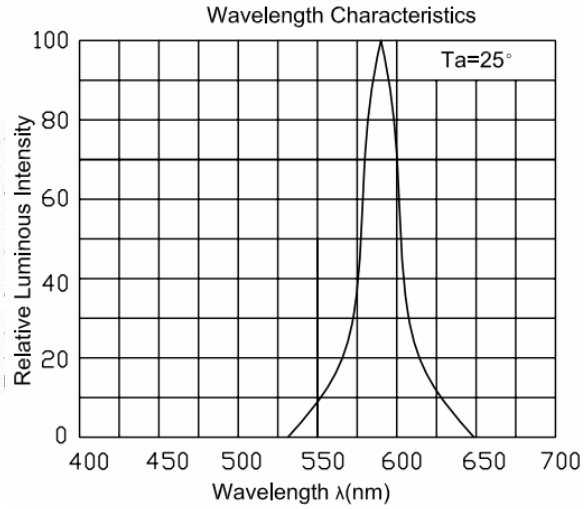

Package Dimensions

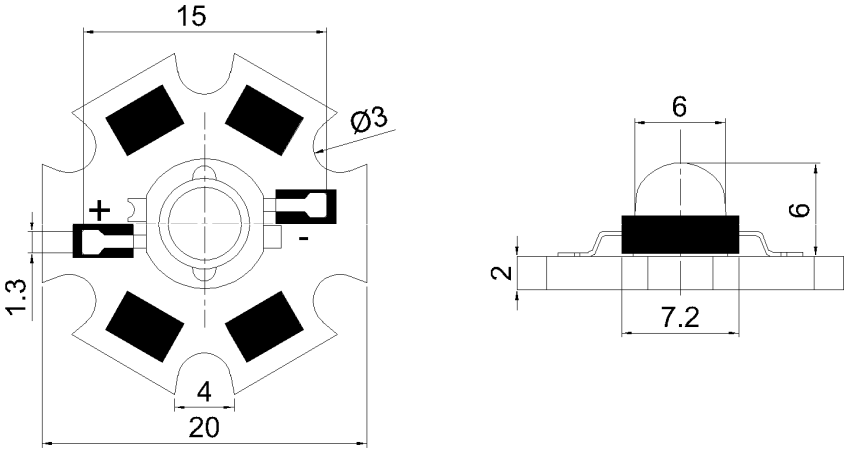

Notes:

1. All dimension units are millimeters.
2. All dimension tolerance is ±0.2mm unless otherwise noted.
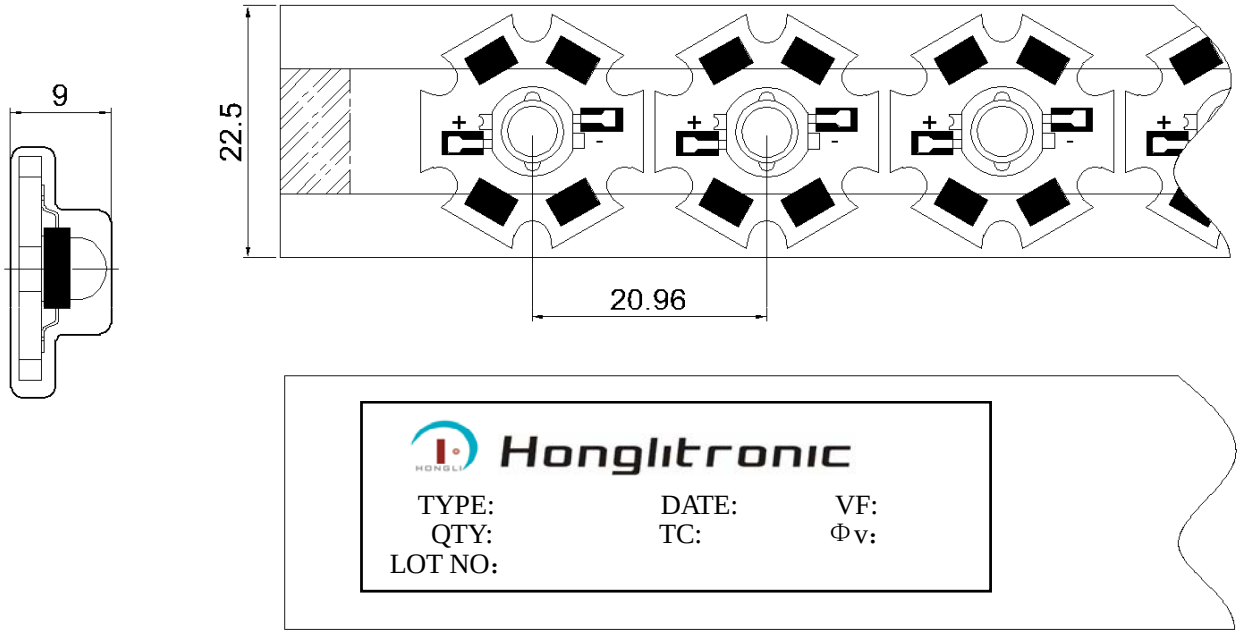
Tape Specifications(Units:mm)