


CIRCUIT DIAGRAM

一般尺寸公差MM	.Xx	.X	L	一般精度公差(°)	.X	L
	±0.05	±0.10	±0.20		±0.5	±1

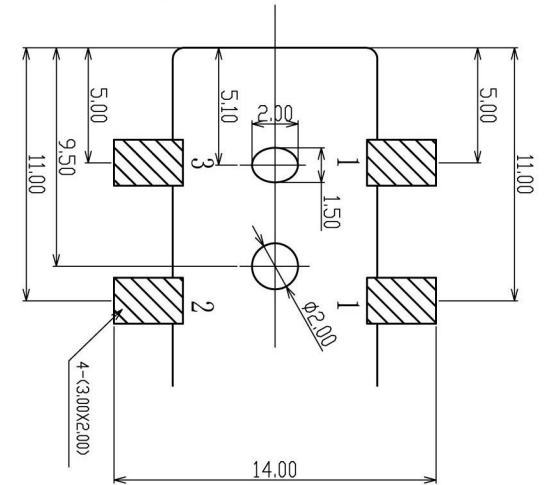

PCB LAYOUT TOP VIEW

Related Specifications,

1. Ratings: 30V/3A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$;
4. Dielectric strength: AC 500V $\text{rms}(50\sim 60\text{Hz})\text{F}/\text{min}$;
5. Disconnection force: $3\sim 20\text{N}$;
6. Life: 5000 circle.

6	Base	1	PA9T(Black)	
5	Lid	1	PA9T(Black)	
4	Pin	1	H62	
3	Contact	1	Brass T=0.4, Ag plated	
2	Cover piece	1	Phosphorous copper T=0.3, Ag plated	
1	Cover foot	1	Brass T=0.4, Ag plated	
Code	Name	Qty	Material	Marks

TACTRONIC

单 位	绘 图	
MM	核 对	
比 例	核 准	
1: 1	日 期	2014年10月20日